



ACCESSORI E COMPONENTI PER SALPA ANCORA

WINDLASS ACCESSORIES AND PARTS

REMOTE CONTROLS


RRC

Radiocomandi
Radio Remote Controls

Ricevitori Receivers

- Range esteso di alimentazione (da 10,5 a 31Vdc).
 - Funzionamento gestito da microcontrollore.
 - Indicazione dello stato di funzionamento, errori e problemi del sistema tramite LED e display a sette segmenti.
 - Protezione contro l'inversione di polarità.
 - Protezione contro la scarica della batteria.
 - 50 trasmettitori inseribili in memoria.
 - Modalità di traslazione per attivare più ricevitori installati in luoghi diversi tramite un unico trasmettitore.
 - Filtro digitale programmabile.
 - Possibilità di attivare 2 funzioni contemporaneamente.
 - Possibilità di collegamento ad un'antenna esterna.
-
- Full supply range (from 10.5 to 31Vdc).
 - Microcontroller-operated functions.
 - Indication of the system operating status, errors and problems by means of LED and seven-segment display.
 - Protection against polarity inversion.
 - Protection against the discharge of the battery.
 - 50 transmitters can be stored.
 - Translation mode to activate more receivers, installed in different spots, by means of one transmitter.
 - Programmable digital filter.
 - Two functions can be activated at the same time.
 - Possible connection to an external antenna.

RRC R02
RRC R04
RRC R06
RRC R08
RRC R10
RRC R12

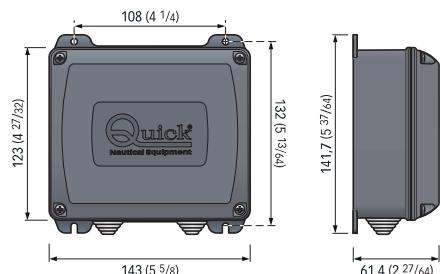

Dimensioni in mm (pollici) / Dimensions in mm (inch)

Modelli / Models	R02	R04	R06	R08	R10	R12	R902	R904	R906	R908	R910	R912
Direttiva di conformità Directive Compliance	2014/53/EU (RED)						FCC CFR47 - Part 15 - Subpart B - Class B					
Frequenza portante / Carrier frequency	434.420 Mhz						913.7 Mhz					
Modulazione / Modulation	FSK						FSK					
N°di trasmettitori memorizzabili / # of storable transmitters	50						50					
Numero relè / Number of relays	2	4	6	8	10	12	2	4	6	8	10	12
Portata in corrente del contatto del relè / Relay contact rating	15 A (*)											
Tensione di alimentazione / Power supply	10,5 ÷ 31 Vdc											
Assorbimento a riposo / Quiescent current	25 mA											
Temperatura operativa / Operating temperature	-15° C +70° C (+5°F ÷ +158°F)											
Peso (con tutti i relè installati) / Weight (with all relays installed)	300 g (0,66 lb)	370 g (0,81 lb)			300 g (0,66 lb)	370 g (0,81 lb)			370 g (0,81 lb)			

* Uso intermittente. / Intermittent use.

RADIOCOMANDI PER ELICHE DI MANOVRA RADIO REMOTE CONTROL BOW THRUSTERS



P.240