


## Retract push-up cleat


AISI 316

Suitable for awning pipes, made of mirror polished AISI 316 stainless steel.


Code	A mm	B mm	C mm	D mm	E mm	F mm	Breaking load kg	OPTIONAL drainer kit
40.136.44	134	110	38	12	65	46	750	40.136.64
40.136.46	185	156	50	18	76	60	1200	40.136.66
40.136.48	220	204	50	-	88	71	1200	40.136.68



40.136.48



40.136.44/46




## Smart Cleat push-up cleat

AISI 316

Made of mirror-polished AISI316 stainless steel. Very compact.

Code	A mm	B mm	C mm	D mm	E mm	F mm	Breaking load kg	OPTIONAL drainer kit
40.136.20	126	21	33	68	11	44	700	40.136.64
40.136.21	155	26	38	75	11	57	1100	40.136.66
40.136.22	203	39	49	85	13	71	1500	40.136.68
40.136.23	260	40	61	103	14	91	1800	40.136.70



## Ghost II hidden cleat

AISI 316

PERFECT GRIP

SMOOTH MOVEMENT

Watertight cleat with mounting screws from above. Very smooth operation. Ergonomic lifting handle. Fluorinated rubber O-ring for smooth sliding. ENAVE approved in compliance with ISO 15084:2003.

Polished SS version	Black SS version	A mm	B mm	C mm	D mm	E mm	F mm	ØH mm	ØG mm	Work-load Kg	Fixing	OPTIONAL drainage conduit
40.155.16	40.156.16	160	38	15	28	47	48	14	24	800	3 x M6 screws	40.155.72
40.155.24	40.156.24	240	52	20	44	70	72	18	32	2050	3 x M8 screws	40.155.74
40.155.31	40.156.31	310	68	25	56	85	93	22	41	5200	3 x M10 screws	-



Video



40.156.xx



40.155.xx




40.155.xx



40.155.xx



40.156.xx



40.156.xx


## Flat push-up cleat, extra-low profile

AISI 316

REGISTERED DESIGN/ DISEGNO DEPOSITATO

Made of mirror-polished AISI316 stainless steel.

Code	A mm	B mm	C mm	D mm	F mm	G mm	H mm	OPTIONAL drainer kit
40.152.16	160	34	9.7	41.7	46	12	24	40.136.64
40.152.24	240	44	13	55.5	72	14	29	40.136.68
40.151.33	330	61	18.8	80	91	19	42	-

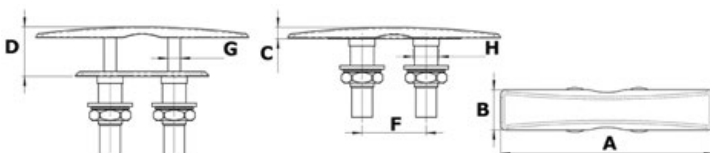

OSCULATI

