

FORTRESS anchor, can be disassembled

Adjustable fluke angle to adapt to any seabed. Made of sturdy **nodized aluminium-magnesium alloy**.

Ideal as sheet anchor. Cited as the best anchor currently available on the market, it came out top in five independent tests, one of which was carried out by the U.S. Navy.


Code	kg	Replaces SS anchors kg	For hull size m	OPTIONAL cava stowage bag	A mm	B mm	C mm
01.100.11	3.4	4/6	8/10	01.099.02	685	559	406
01.100.16	4.5	6/8	10/12	01.099.03	787	635	457
01.100.23	6.8	8/13	12/14	01.099.04	914	737	533
01.100.37	9.5	13/23	14/16	01.099.05	1016	813	610
01.100.55	14.4	23/29	16/18	01.099.06	1168	940	686
01.100.85	21.2	32/41	-	-	1300	1040	760



Hall traditional anchor

Sturdy hot-galvanized steel anchor for any seabed. Fitted with sharp-angle articulated arm.


Code	kg	A mm	L1 mm	L4 mm
01.142.25	2.5	290	160	140
01.142.04	4	320	180	170
01.142.05	6	350	210	210
01.142.08	8	380	230	230
01.142.10	10	400	240	240

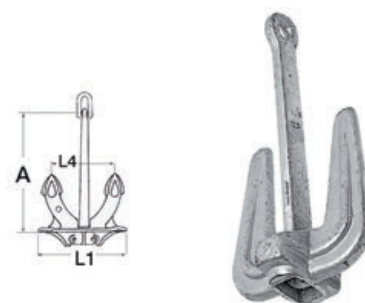

Hall anchor

Made of **hot-galvanized cast iron**.


Code	kg	A mm	L1 mm	L4 mm
01.103.18	16	330	310	230
01.103.28	23	350	350	245
01.103.36	34	410	395	280
01.103.48	45	465	445	325
01.103.65	60	505	505	315

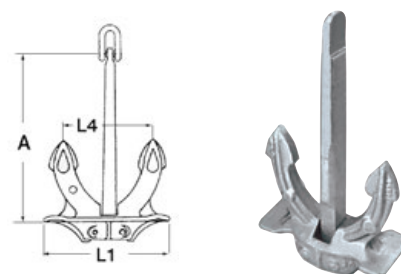

Plough anchor

Made of very thick high-strength hot-galvanized **steel**. Similar to CQR anchors, excellent performance on all seabeds.

Code	kg	A mm	B mm	C mm	D mm	E mm	F mm	G mm
01.144.07	7	260	640	340	230	540	220	55
01.144.09	9	330	780	410	280	600	280	65
01.144.12	12	320	800	430	280	650	280	65
01.144.16	16	380	950	500	320	760	310	75
01.144.22	22	400	1050	490	360	800	345	80
01.144.27	27	520	1090	520	380	830	380	85
01.144.35	35	580	1110	580	410	920	410	95

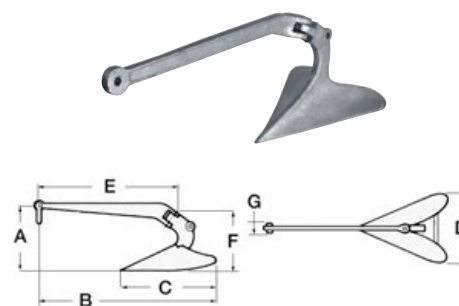

Admiralty anchors.

Hot-galvanized steel anchor with **foldable flukes** for better stowage.

Code	kg	A mm	B mm	C mm	D mm	E mm	F mm
01.114.05	5	382	50	60	380	205	230
01.114.10	10	490	60	70	500	255	280
01.114.15	15	550	60	80	542	290	320
01.114.20	20	590	68	90	600	340	360
01.114.25	23.5	615	68	90	640	340	360
01.114.35	35	660	75	130	780	370	400

