4. Hatch & Portlight



Stainless Steel Portlight


With its highly polished stainless outer frame, the Stainless Portlight offers a clean, modern look. The handles and hinge system are designed to leave the lens clear of obstructions, giving an uncluttered view.


- ABS plastic trim
- Easily fitted by clamping the cabin sides between inner and outer frame with screws provided that are fastened into the outer frame
- Can be installed with sealant or closed cell PVC tape
- Trim with clean styling
- Full range of spare parts available online at www.lewmar.com

Specifications options:


- Handles: clip (standard) / twist (option)
- Moulding colour: grey
- Acrylic colour: grey (standard), other colours available
- Frame colour: stainless steel
- Comes complete with trim and flyscreen












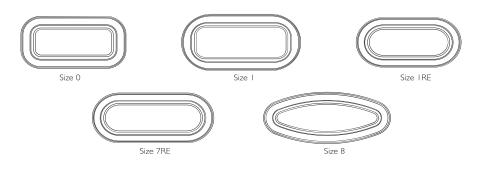





				OVERALL DIMENSIONS							CUT-OUT DIMENSIONS										
PART		TRIM		LENGTH		WIDTH		Z HEIGHT		RADII		X1 LENGTH		Y1 WIDTH		R1 RADII		PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
NUMBER	SIZE	COLOUR	VERSION	ММ	IN	MM	IN	ММ	IN	ММ	IN	ММ	IN	ММ	IN	ММ	IN	KG	LB	ММ	IN
393020262	0	WHITE	OPENING	176	6 ¹⁵ / ₁₆	323	12 ¹¹ / ₁₆	4	5/32	62.0	2 7/16	156	6 ¹ / ₈	303	12	52.0	2 1/16	1.5	3.30	8	1/2
393010262	0	WHITE	FIXED	176	6 ¹⁵ / ₁₆	323	12 11/16	4	5/32	62.0	2 7/16	156	6 ¹ /8	303	12	52.0	2 ¹ / ₁₆	1.5	3.30	10	3/8
393120262	1	WHITE	OPENING	191	7 1/2	367	14 7/16	4	5/32	62.0	2 7/16	171	6 ³ / ₄	347	13 5/8	52.0	2 ¹ / ₁₆	1.7	3.80	8	1/2
393110262	1	WHITE	FIXED	191	7 1/2	367	14 7/16	4	5/32	62.0	2 7/16	171	6 ³ / ₄	347	13 ⁵ /8	52.0	2 ¹ / ₁₆	1.7	3.80	10	3/8
393180262	1RE	WHITE	OPENING	191	7 1/2	367	14 7/16	4	5/32	95.5	3 3/4	171	6 ³ / ₄	347	13 5/8	85.5	3 ³ /8	1.7	3.74	10	3/8
393170262	1RE	WHITE	FIXED	191	7 1/2	367	14 7/16	4	5/32	95.5	3 ³ /4	171	6 ³ / ₄	347	13 ⁵ /8	85.5	3 ³ /8	1.7	3.74	10	3/8
393780262	7RE	WHITE	OPENING	191	7 1/2	425	16 ³ /4	4	5/32	95.5	3 ³ /4	171	6 ³ / ₄	405	15 ¹⁵ / ₁₆	85.5	3 ³ /8	1.9	4.18	10	3/8
393770262	7RE	WHITE	FIXED	191	7 1/2	425	16 ³ /4	4	5/32	95.5	3 3/4	171	6 ³ / ₄	405	15 ¹⁵ / ₁₆	85.5	3 ³ /8	1.9	4.18	10	3/8
393820862	8	CHROME	OPENING	196	7 11/16	452	17 ¹³ / ₁₆	4	5/32	N/A	N/A	SEE DRAWING ON WEBSITE				1.9	4.18	10	3/8		
393810862	8	CHROME	FIXED	196	7 ¹¹ / ₁₆	452	17 ¹³ / ₁₆	4	5/32	N/A	N/A	SEE DRAWING ON WEBSITE				1.9	4.18	10	3/8		


Round Stainless Steel Portlight

Round stainless steel Portlight Dimensions

Cut-out Dimensions







Round Stainless Steel Portlight Specifications

			OVERALL Ø CUT-OUT DIAME						:R					
PART	TRIM		мм	IN	Ø		Α		В		WEIGHT		THICK	NESS
NUMBER	COLOUR	VERSION	ММ	IN	мм	IN	MM	IN	ММ	IN	KG	LB	ММ	IN
30209800	CHROME	OPENING	250	9 ⁷ /8	230	9 ¹ / ₁₆	76	3	113	4 ⁷ /16	1.4	3	10	3/8
30209900	CHROME	OPENING	296	11 5/8	277	10 7/8	100	3 ¹⁵ / ₁₆	136	5 3/8	2.0	4	10	3/8

Maximum hull thickness 24mm

Minimum hull thickness 8mm

All portlights are supplied with M5 \times 12 fastenings

Flyscreen available for the Round Stainless Portlights