

CM MOORING SERIES BUOYS




The CM Mooring Series Buoy has been designed to provide the ultimate in strength, durability and boat protection, giving increased security to any mooring.

Choose between vinyl-coated galvanized steel or durable stainless steel

- Even wall thickness for maximum strength and durability
- The CM is available in three color versions: fluorescent red, all white or white with a blue stripe
- Polyform's vinyl valve system maintains buoy inflation
- Limited three-year warranty

CM SERIES SPECIFICATIONS

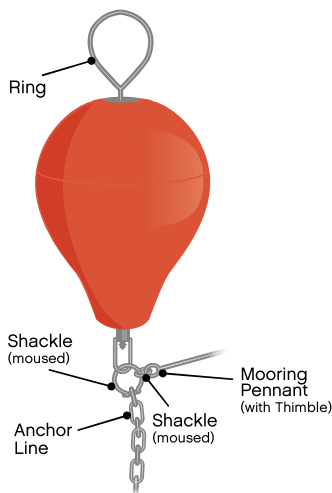

Check your mooring hardware regularly.

Do not use the ring for mooring of the boat. Only use the ring to pick the buoy out of the water.

In adverse conditions, a second mooring pennant can be run to the top eye as a safety in case the primary pennant chafes through or fails. All shackles should be moused to prevent opening. Electricians plastic tie wraps are an excellent means of securing a shackle.

	CM-2	CM-3
DIAMETER	34,3 cm	45,7 cm
LENGTH	45,7 cm	55,9 cm
IRON LENGTH WITH SHACKLE	78,7 cm	88,9 cm
TUBE DIAMETER	1,6 cm	1,6 cm
CIRCUMFERENCE	107,8 cm	135,7 cm
DIAMETER	34,3 cm	43,2 cm
VOLUME	25,0 liters	44,7 liters
UNIT WEIGHT	4,2 kg	5,4 kg
UNITS PER CARTON	5	5
CARTON WEIGHT	24,2 kg	30,6 kg
CUBIC METERS PER CARTON	0,17 m ³	0,17 m ³

*Maximum inflation pressure is 2 psi, over-inflation voids warranty.