

**Trimmer anchor swivelling connector**

**AISI 316** Polished AISI 316 stainless steel. Fitted with a double joint to avoid the lever boom effect with held-on anchor. Anti-oscillation connection to the anchor during lifting when approaching the roller/bow. Safety screws. Side load 3 times as powerful as traditional connectors.

Code	Chain Ø mm	A mm	B mm	C mm
01.739.01	6/8	200	15	7/17
01.739.02	10/12	230	22	20/30
01.739.03	12	235	27	30/50


*Douglas Marine*



**Rope/chain connector**

**AISI 316** Designed to connect the anchor chain into the respective line, without knots; it is also suitable for stern mooring. Made of **mirror-polished AISI 316 stainless steel**.

Code	Chain Ø mm	For ropes Ø mm
01.230.01	6	10
01.230.02	8	12
01.230.03	10	16

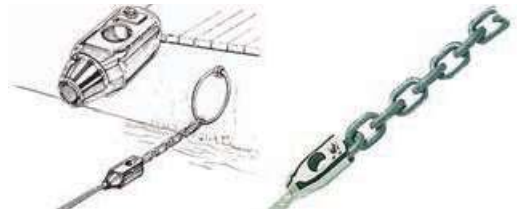


**Chain link for calibrated chain**

**AISI 316** Made of AISI316 stainless steel. Highly resistant due to its structural design that includes 8 locking pins capable of reaching working and breaking loads equal to or higher than those of the chains. Measures in mm (while the other connecting links available on the market are in inches) that fit precisely into windlass calibrated chains, **they slide smoothly onto the gypsy preventing dangerous jamming.**

Code	Ø D mm	A mm	B mm
01.672.06	6	31.5	20.5
01.672.08	8	40.5	26.5
01.672.10	10	50.5	35.5
01.672.12	12	61	40.5

**OSCOLATI**

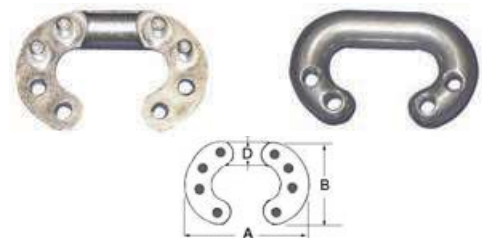

**Chain link**

Made of stainless steel, for calibrated chain

Stainless steel	Chain Ø D mm	A1 mm	A mm	L mm	L1 mm
01.671.06	6	11	23	33	21
01.671.08	8	12.5	29	40	24
01.671.10	10	15	34.5	48	29
01.671.12	12	19	42	62	38



**Galvanized steel swivel made for anchor chains and buoys**

Double eye, ideal for mooring lines

Code	A mm	L mm	L1 mm	B mm	B1 mm
01.427.10	10	125	23.5	51	30.8
01.427.12	13	165	33	63	36
01.427.14	16	200	40.8	75.5	42.6
01.427.16	19	225	42.8	88.5	50



**AISI316 stainless steel swivel**

Double eye, ideal for mooring lines.

Code	A mm	L mm	L1 mm	B mm	B1 mm
01.018.04	4	50	13	19.5	11.5
01.018.05	5	60	13	23	13
01.018.06	6	65	15	26	15
01.018.08	8	90	22	35	20
01.018.10	10	115	27	44	24
01.018.13	13	148	33	59	33
01.018.16	16	188	42	75	39



**Mirror-polished AISI 316 stainless steel swivel**

Very sturdy, forged steel, ideal for mooring buoys, halyards, anchor chains, etc.

Shackle + shackle	Shackle + shackle (flush pin)	Eye + shackle	Eye + shackle (flush pin)	A mm	B mm	C mm	D mm
01.428.99	-	01.427.99	-	60	10	11	5
01.429.00	01.439.00	01.428.00	01.438.00	66	12	11	6
01.429.01	01.439.01	01.428.01	01.438.01	88	16	16	8
01.429.02	01.439.02	01.428.02	01.438.02	113	20	22	10
01.429.03	01.439.03	01.428.03	-	152	26	28	13
01.429.04	-	01.428.04	-	188	32	36	16

