


Spare parts for TECMA electric toilets

Code	Description	For Tecma electric toilet bowls	V
50.226.50	All in One 2-button control panel, 2 frames (one white and one black).	G1 and G2	-
50.226.51	Multifunction Touch SFT Control Panel	G1 and G2	-
50.226.60	Macerator pump	G1 and G2	12
50.226.61	Macerator pump	G1 and G2	24
50.226.65	Plastic solenoid (it also replaces brass solenoids)	G1 and G2	12
50.226.66	Plastic solenoid (it also replaces brass solenoids)	G1 and G2	24
50.226.71	Seal and valve kit	G1 and G2	-
50.226.80	Clean water inlet kit (white)	G1 and G2	-

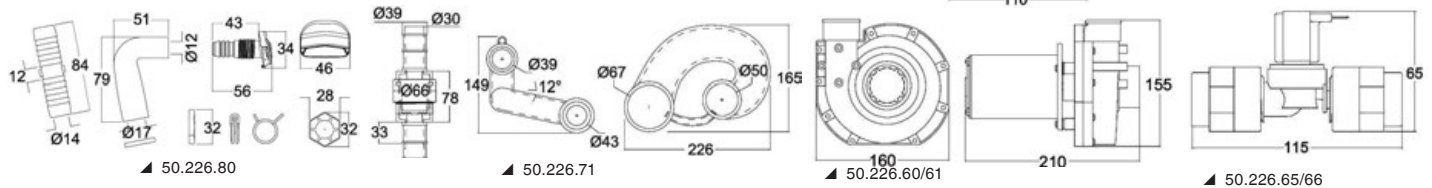

WC control panels

Switch "toilet FLUSH"

For driving electric toilet units size 15 A of any brand, **watertight**; automatic return toggle and built-in **magnetothermic** fuse.



Code	V	Panel mm
50.207.09	12/24	80x60

Electric control panel, universal size for electric toilets

100% waterproof; fitted with protective fuse, 2 position micro-relay power and control; partial bowl filling option (aprox. 2l) or full bowl (aprox 4l).



Code	V	Panel mm
50.207.07	12	110x80
50.207.08	24	110x80

Toilet unit control panel

Fitted with touch key button and LED light indicator that signals the waste water level on the respective tank, version suitable for traditional electric toilet units.

Code	mm		For toilet bowl
	front	overhang recess	
50.204.41	125x80	10	50.205.12; 50.205.24; 50.206.12; 50.206.24; 50.207.12; 50.207.24; 50.213.01; 50.213.02; 50.213.03; 50.213.04; 50.205.13; 50.207.13



Manual control panel

Manual control panel for WC SILENT series 50.212.xx / 50.216.xx / 50.213.xx / 50.218.xx / 50.215.xx. Designed for those who prefer a simpler and very strong control system. Equipped with CARLINGSWITCH watertight switches. Double function push button: water inlet in position 1, water outlet in position 2. The second push button let the water in and out at the same time and also makes a final washing.

Code	V	mm
50.204.43	12/24	100x60



Electronic control panel

Code 50.204.42

Standard panel supplied with all SILENT toilets. Three buttons for use: "before use", it lets water inside the bowl, "after use" for rinsing and emptying of the bowl, "short use" for rinsing and emptying with water reduced consumption. Size compatible with Vimar plates. The panel has 3 LED lights indicating the level of the collection tank when connected to the probe 50.204.33 to be ordered separately.



Electric control panel for standard electric toilets

Code 50.204.44

Manual and simplified control panel for any traditional electric toilet. Watertight and button-operated microswitch. 24A max. amperage @ 12V. 12/24V operating voltage. Overall dimensions: mm 104 x 61.5.



Electronic depth probe

Depth probe for black water tanks. Adjustable length by cutting the little rods. To match the WC control panel (50.204.42). International 5-hole standard flange.

Code	OPTIONAL To combine with control panel
50.204.33	50.204.41; 50.204.42

