

Standard Deckhatches with flange



SMOOTH DESIGN

For a smoother profile, the frame on our standard hatches has been extended to fit flush against the base mounting. The base mounting screws are covered by the frame for a smoother appearance and extra safety.

Deep grooves in the lower frame provide a 100% water-tight assembly.

STEPLESS OPENING, TO 180°, PLUS EASY HINGE ADJUSTMENT

Heavy duty friction hinges secure the hatch in any position from ventilation to



full 180°. Hinges are also easily adjustable to suit the user.



UNIQUE DEEP-DECK WATER GROOVE

A deep groove in the lower frame keeps water from coming in when the hatch is open.

The Gebo's unique Airco-Lock theft-proof



ventilation setting lets fresh air in while the crew rest or when the boat is unattended. The hatch is locked from the inside, either in the ventilation or the fully closed position.

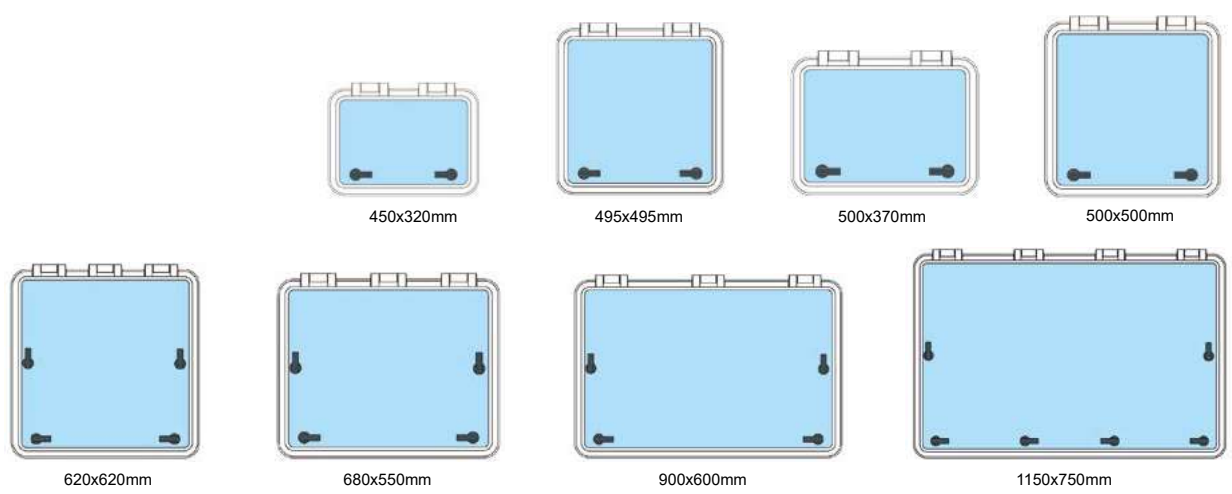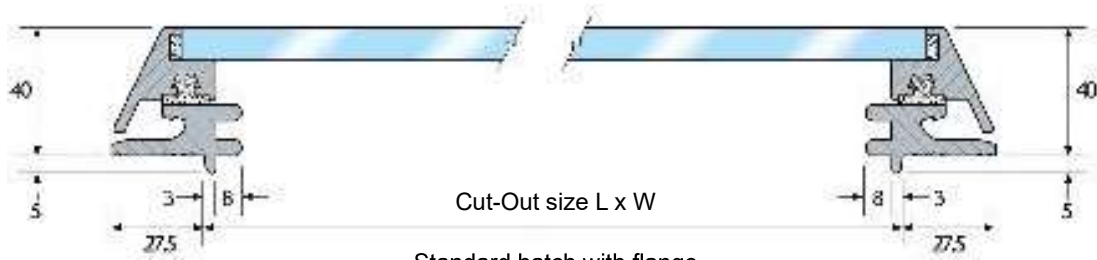

THE BENEFITS:

- ✓ timeless design;
- ✓ stepless opening to 180°;
- ✓ unique Airco-Lock theft-proof ventilation setting;
- ✓ unique deep-deck water groove;
- ✓ 100% watertight assembly;
- ✓ standard CE Class A Ocean



Styling,
Safety &
Comfort

**CE Class-A
Ocean**

MOSQUITO SCREEN



INNERRIM



FLY-BLIND



GEBO CUSTOM MADE

Gebo offers the possibility to manufacture custom made hatches. Please contact us for more information.

Standard Hatches with Flange

Article no.	Cut-out size L x W mm	Radius mm	Overall size LxW mm	Radius mm	Acrylic mm	Mosquito screen	Mosquito screen size	Innerrim aluminium	Fly-blind
80.21.10.00	450 x 320	55	505 x 375	83	10	84.55.00.40	436,5 x 310	80.07.45.04	84.70.01.50
80.90.01.29	495 x 495	95	550 x 550	123	10	84.55.00.50	485 x 485		
80.21.20.00	500 x 370	55	555 x 425	83	10	84.55.00.41	486,5 x 360	80.07.45.00	84.70.01.51
80.21.30.00	500 x 500	55	555 x 555	83	10	84.55.00.42	490 x 490	80.07.51.00	84.70.01.52
80.21.40.00	620 x 620	55	675 x 675	83	15	84.55.00.43	610 x 610	80.07.39.00	84.70.01.53
80.21.45.00	680 x 550	55	735 x 615	83	15	84.55.00.45	666,5 x 540	80.07.68.05	
80.30.10.00	900 x 600	55	955 x 655	83	15				
80.23.00.00	1150 x 750	55	1205 x 805	83	15				