

Precision cast mirror polished AISI 316 stainless steel Deck filler plugs Fuel, low profile

Clean **flat finish** (protrudes 6mm once installed). To be opened with a winch handle or with hex keys.


Code	Type	Neck Ø mm	Cap Ø mm	Bore Ø mm
20.450.01	FUEL	50	87	55
20.450.02	WATER	38	87	55
20.450.03	Diesel	50	87	55
20.450.04	WASTE	38	87	55

20.715.10 Opening key *OPTIONAL*

20.169.90 Opening key *OPTIONAL*

20.714.01 Opening key *OPTIONAL*

OSCULATI

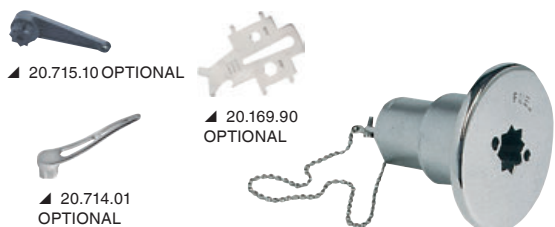

"Francia" Mirror-polished AISI 316 stainless steel deck fillers


With symbols in compliance with DIN standards. Opening by means of the winch handle hexagon.

Code	Type	Neck Ø mm	Flange Ø mm	Length mm	Notes
20.461.02	WATER	38	90	75	With key
20.461.03	Diesel	50	90	82	With earth connection
20.461.04	ESSENCE / PETROL	50	90	82	-
20.461.06	WASTE	50	90	75	Without chain
20.461.09	WASTE	38	88	114	Without chain

20.715.10 Opening key *OPTIONAL*

20.714.01 Opening key *OPTIONAL*

OSCULATI

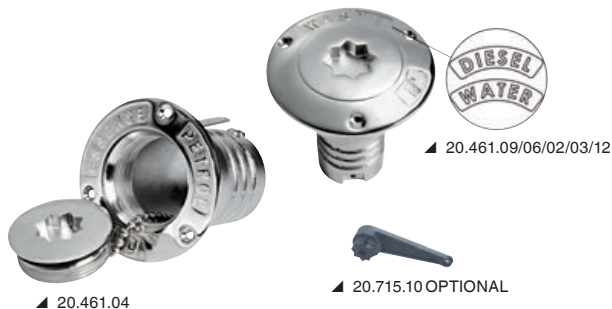

AISI316 stainless steel deck filler

Precision cast and mirror polished, RINA certified. Opening lid, screws fully covered by the flange.

Code	Type	Neck Ø mm	Flange Ø external mm	Key
20.568.21	FUEL	50	88	Yes
20.568.22	WATER	38	88	Yes
20.568.23	Diesel	50	88	Yes
20.568.06	WASTE	38	88	no
20.568.31	FUEL	38	88	Yes

OSCULATI



Precision-cast mirror polished AISI316 stainless steel deck filler

Flush-mount plug, invisible screws hidden by the deck filler cap.

Code	Type	Neck Ø mm	A mm	B mm	C mm
20.866.23	WATER	38	84.5	12	76
20.866.35	WASTE	38	84.5	12	76
20.866.39*	WASTE	38	96.3	11	114
20.866.30	FUEL	38	84.5	12	76
20.866.31	Diesel	50	95.5	12	81.5
20.866.32	FUEL	50	95.5	12	81.5

*In compliance with ISO 8099, long neck



OSCULATI



SQUARE deck fillers

Tip-over opening system. Thin profile with only 3,5 mm thickness. **Made of mirror-polished AISI 316 stainless steel.**

Short version	Long version	Neck Ø mm	Type
20.454.01	-	38	FUEL
20.454.02	20.455.02	38	WATER
20.454.03	20.455.03	38	Diesel
20.454.06	20.455.06	38	WASTE

