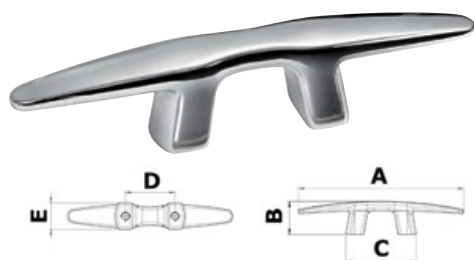


OSCULATI**Camel cleat****AISI 316**Stud mounting, made of **mirror-polished AISI316 stainless steel**.

Code	Length mm	Centre distance mm	Stud Ø mm	Breaking load kg	OPTIONAL stainless steel base
40.133.15	150	45.4	6	1866	40.133.50
40.133.20	200	59.6	8	2682	40.133.51
40.133.25	250	76.3	10	5741	40.133.52
40.133.30	300	91.8	12	7613	40.133.53

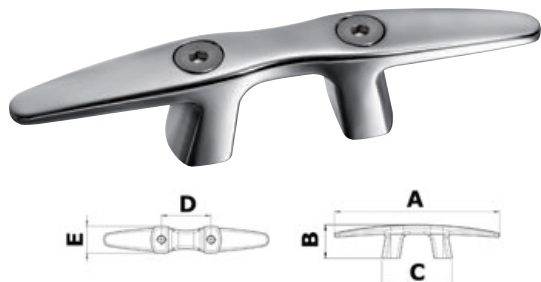
OSCULATI**Reinforcement/finishing base for Camel cleats****AISI 316**

Code	mm	For bollards
40.133.50	25x65	40.133.15
40.133.51	35x90	40.133.20
40.133.52	50x110	40.133.25
40.133.53	60x140	40.133.30

OSCULATI**Silhouette cleat****AISI 316****REGISTERED DESIGN / DISEGNO DEPOSITATO**

Mirror-polished AISI316 stainless steel.

Code	A mm	B mm	C mm	D mm	E mm	Ø studs
40.150.15	150	30.5	63.5	45	24.5	M8
40.150.20	200	40	85	60	32.5	M10
40.150.25	250	50	106.5	75	40.5	M12
40.150.32	320	64	136	96	52	M14
40.150.38	380	76	161.5	114	61.5	M16

**Silhouette cleat with bores****AISI 316**


Mirror-polished AISI316 stainless steel.

Code	A mm	B mm	C mm	D mm	E mm	Through bolt Ø mm
40.153.15	150	30.5	63.5	45	24.5	8
40.153.20	200	40	85	60	32.5	10
40.153.25	250	50	106.5	75	40.5	12
40.153.32	320	64	136	96	52	14
40.153.38	380	76	161.5	114	61.5	16

OSCULATI**Bull Dog cleat****AISI 316**

Made of mirror-polished AISI316 stainless steel, stud mounting.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm	Breaking load kg	Recommended studs	White plastic base OPTIONAL
40.131.16	158	35	74	53	49	8	4497	40.142.09	40.131.40
40.131.20	205	44	94	64	62	10	6106	40.142.11	40.131.41
40.131.25	255	54	118	80	76	10	7051	40.142.11	40.131.42
40.131.30	305	65	127	90	82	14	-	40.142.14	-

**Bull Dog cleat - Black line****AISI 316**

Made of polished stainless steel with a surface coating that integrates a black layer in the steel cleat whose surface becomes extremely hard and corrosion-resistant.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm	Recommended studs
40.131.56	158	35	74	53	49	8	40.142.09
40.131.57	205	44	94	64	62	10	40.142.11

