

Ashtrays



Ashtrays

Made of **stainless steel**; fitted with non-skid bottom and leads for best stability; high quality design, fitted with cigarette holder.

Code	Colour	Ø mm
32.507.00BL	blue	106
32.507.00RO	red	106

Drogues (Sea anchors)



Mini Sea Anchor

Designed to be attached to the life jacket, in order to prevent a man overboard from being dragged by the current.

Code	Ø mouth cm	Length cm
32.757.03	15	25



Sea-Drouge (floating drogue)

Professional model made with high-quality PVC-coated wide-weave nylon fabric. Towing strips and reinforcement of the bushings with nylon tape.

Code	Ø mouth cm	Length cm	Recommended for boats m
32.756.01	60	53	6
32.756.02	80	70	8
32.756.03	107	110	10
32.756.04	135	140	12

OSCULATI





Spera bicone (floating anchor) Antell PTY Australia

The dual-cone profile increases the seabrake efficiency as the sea strength increases. Water goes out through the drain plug between the cones thus keeping the trim constant. Made with ultra sturdy materials.

Possible uses: floating anchor, anti-gliding anchor, reduces broaching, anti-rolling when at anchor, stabilizes the boat at tow, reduces drifting, break, stabilizer, emergency steering system. It comes in a bag.

Code	Model	cm		Recommended for boats up to m
		Width (R)	Length (L)	
32.783.01	HT 24L	65	200	10.5
32.783.02	HT 30L	80	240	16.5
32.783.03	HT 48L	120	360	22.5
32.783.04	HT 60L	150	470	29

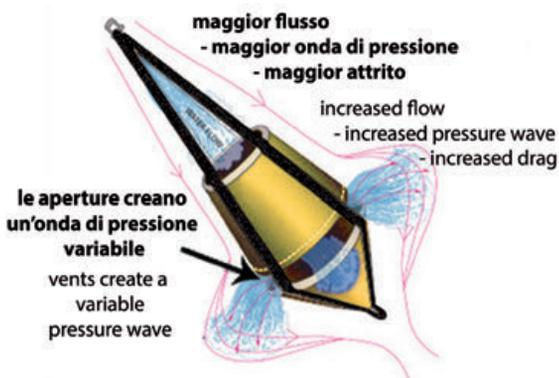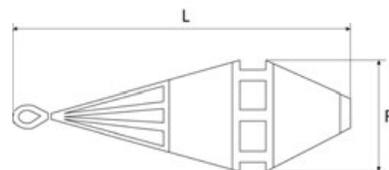

Dual-cone drogue (floating anchor)

Constructed with highly resistant materials, the double cone profile creates a particular turbulence that increases the effectiveness of the "Seabrake" as the sea force increases. Water exits from the 4 drains at the base, maintaining a constant trim. **Nine possible uses:** 1) floating anchor; 2) anti-planning anchor, reduces the risk of oversteering and planning; 3) anti-roll in the bay; 4) emergency tacks; 5) stabilizes the boat when towing; 6) anchor and drift; 7) brake; 8) stabilizer; 9) emergency rudder. Supplied with a bag.

Code	Model	Recommended for hulls up to m
32.782.01	GP 24I	10.5
32.782.02	GP 30I	16.5
32.782.03	GP 48I	22.5
32.782.04	GP 60I	29

