

Hidden- screw alloy cleat

Made of **anodized aluminium**, modern and practical design, 2-stud mounting.

Code	Length mm	Centre distance mm	Ø Studs mm
40.107.03	200	79.6	8

**Jamming cleat**

Made of **anodized aluminium**, fitted with clam cleat.

Code	Length mm	For ropes with Ø mm	Centre distance mm
40.124.00	160	8/14	31
40.124.01	125	6/10	24.8

**Hollow Cleat**

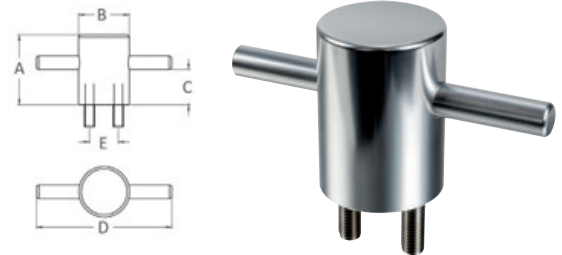
Made from **anodised aluminium**, in "American" style, they are functional and sturdy bollards.

Code	Length mm	Wheelbase long. mm	Transverse spacing mm
40.108.15	160	58.7	40.4
40.108.20	210	77.5	45.8
40.108.25	260	94.5	53

**New Thor cleat**

Made of polished aluminium. Complete with stud.

Code	A mm	B mm	C mm	D mm	E mm	Stud Ø mm
40.109.16	83	Ø 60	42	160	34	12

**Aero cleat**

Made of anodized aluminium, fitted with studs (T).

Code	L mm	H mm	E mm	T	T2
40.103.15	158	35	45	M8x70	50
40.103.20	208	38	60	M10x70	50
40.103.25	258	45	68	M12x75	50
40.103.30	308	51	78	M14x80	50
40.103.40	408	63	96	M16x115	80

**OSCULATI****Black Aero cleat**

Black anodized aluminium. Fitted with studs (T).

Code	L mm	H mm	E mm	T	T2
40.102.15	158	35	45	M10x70	50
40.102.20	208	38	60	M10x70	50
40.102.25	258	45	68	M12x75	50
40.102.30 New	308	51	78	M14x80	50


**OSCULATI****Dutch style mushroom cleat**

Made of mirror-polished anodized **aluminium**, fine polish on all parts, rounded corners, stud mounting.

Code	Length mm	Width mm	Height mm	Centre distance mm	Ø Studs mm	kg
40.172.53	160	51	61.5	91.5	8	0.5
40.172.54	200	66	76	114.5	10	1.1
40.172.55	250	81	90	145.5	14	2
40.172.56	350	98	130	170	16	6

**Fairlead**

Made of polished **anodized aluminium**, right and left traditional models, fine polish even inside.

Code	Length mm	Centre distance mm	 ORDER BY BOX
40.117.14	140	110	2
40.117.17	170	134.5	2
40.117.21	205	173	2
40.117.26	255	220	2

