

Portable compasses



RIVIERA compass with soft casing

Impact resistant; fitted with neck strap; ideal for surfing, for small boats or as emergency compasses and as bearing compasses as they have a front and double upper reading; 5° to 5° rose graduation, pin suspension, **floating**. Models:

- "MIZAR": with fixed ring

- "ORION": with external turning ring

Model		Colour	Ø apparent pink
MIZAR	ORION		
25.066.04	25.066.08	blue	1"7/8
25.066.02	25.066.06	yellow	1"7/8
25.066.01	-	grey	1"7/8
25.066.03	-	red	1"7/8




▲ 25.066.04



▲ 25.066.08



▲ 25.066.02



▲ Mizar model




▲ 25.066.06



▲ 25.066.01



▲ 25.066.03



▲ Orion model

Bearing compasses

Bearing and steering compass



Code 25.900.00

Fitted with magnifying glass, double scale in grades and points, very stable, very clear night reading, side scale meter, kerosene suspension, 1° estimate possible. Specially suited for dinghies or small boats.


Pocket compass



Black ABS body, liquid-filled rose, swivelling gimbal ring fitted with an arrow to determine the route. Blister packaging.

Code	Pink Ø mm
25.950.00	45

Bearing compass CD703L



Liquid-filled compass with **rotating** rose, scale meter and foldable sight frame.

Code	aperta mm
25.703.00	57x160

Bearing compass PRISMA with case




▲ 25.065.02

▲ 25.065.03

Code	Description
25.065.02	Model fitted with graduated circle of 1° in 1°, liquid suspension, straight prism reading; equipped with temperature variation adsorbing diaphragm, battery light. It can also be used as a steering compass.
25.065.03	Prisma compass wooden box.

MINI COMPASS 2000

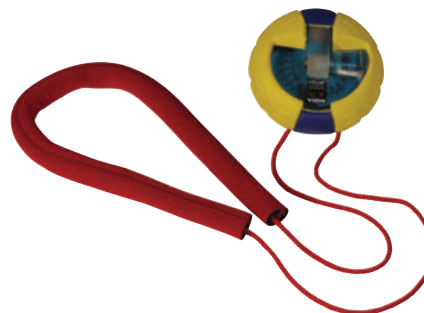

Compass fitted with **rubber** anti-shock housing. BETA ray permanent lighting. Magnifying lens for use as both bearing compasses and steering compasses. It uses the twenty-year-old unmatched **direct vision** system without lubber lines. The rose image is enlarged **10 times**; no parallax, 0.5° interval estimate. Excellent rose stability and quickness.

Code	Ø mm	Thickness mm	g
25.420.30	80	29	120