


Black water tank with horizontal soaker

OSCOLATI

Sold already mounted and ready for installation. Compatible with all manual and electric WC. EQUIPPED WITH: electric soaker; 1" 1/2 + 3/4" loading female threads; 3/4" vent female threads; 1" 1/2 manual emergency drain female threads; housing for fastening hooks 52.195.00; shut-off valve for soaker drainage in case of maintenance; 5-bore flange for level sensor (sensor to order separately); protection for sensor level. Manufactured in compliance with the ISO 8099 standard.

Code	Net volume l	V	Macerator included	Macerator outlet Ø mm	Max length for float cm	mm			SS plate for tank fastening OPTIONAL
						A	B	C	
50.147.50	40	12	50.220.12	25	25	500	390	300	52.195.00
50.147.51	40	24	50.220.24	25	25	500	390	300	52.195.00
50.147.65	60	12	50.220.12	25	25	650	390	300	52.195.00
50.147.66	60	24	50.220.24	25	25	650	390	300	52.195.00
50.147.80	80	12	50.220.12	25	25	800	390	300	52.195.00
50.147.81	80	24	50.220.24	25	25	800	390	300	52.195.00
50.147.91	105	24	50.220.24	25	25	1050	390	300	52.195.00

Recommended joint: group "52" made of nylon, group "17" made of metal

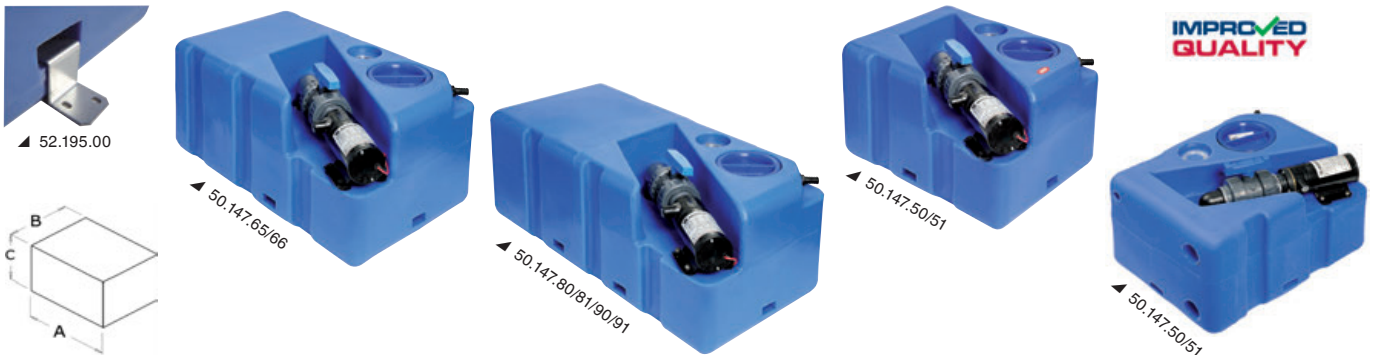

Black water tank with horizontal macerator and hose connector inlets

OSCOLATI

Sold already mounted and ready for installation. Compatible with all manual and electric toilet units. FITTED WITH: electric macerator; vent with 16-mm Ø hose connector; housing for fastening hooks 52.195.00; shut-off valve for soaker drainage in case of maintenance; 5-bore flange for level sensor (sensor to order separately); protection for sensor level. Manufactured in compliance with the ISO 8099 standard.

Code	Net volume l	V	Macerator included	Macerator outlet Ø mm	Max length for float cm	SS plate for tank fastening OPTIONAL
50.141.50	50	12	50.220.12	25	25	52.195.00
50.141.70	70	12	50.220.12	25	25	52.195.00
50.141.90	91	12	50.220.12	25	25	52.195.00
50.141.91	91	24	50.220.24	25	25	52.195.00

Recommended joint: group "52" made of nylon, group "17" made of metal

