


LEWMAR Epsilon anchor

SUPER-HIGH HOLDING POWER

Deriving its sturdiness and quality from the Delta anchor, the Epsilon anchor is Super-High Holding Power certified by Lloyd. Its concave fluke and ballasted keel ensure record holding and super-fast grip.

Stainless steel	kg	Recommended chain mm	Recommended for hulls up to m	A mm	B mm	C mm
01.127.06	6	6-7	10	483	271	8
01.127.10	10	8	13	573	332	10
01.127.16	16	8	15	670	376	12
01.127.20	20	10	17	720	406	12
01.127.25	25	10	18	778	438	16
01.127.32	32	10	21	839	474	16
01.127.40	40	10	23	907	512	20
01.127.50	50	12	25	974	550	20
01.127.63	63	12	27	1049	595	22




LEWMAR Delta® zinc-plated steel anchor

HIGH HOLDING POWER

Its best features include: - Exceptional holding power to grab into any seabed (including seaweed grounds). - Quickness to re-grab the hold when the spinning boat tends to trip the anchor. - Real ability to improve its hold when the wind increases. Tests carried out under various conditions confirm that the Delta anchor has the best hold/weight rate. **Lifetime warranty against breaks** and Lloyd's Test Certification as **High Holding Power anchor**.

Code	kg	Recommended chain mm	Recommended for hulls up to m	A mm	B mm	C mm	D mm	E mm
01.108.04	4	6-7	7	514	228	8	387	210
01.108.06	6	6-7	9	595	263	10	450	241
01.108.10	10	8	11	695	308	12	526	283
01.108.16	16	8	13	812	360	12	614	334
01.108.20	20	10	15.5	877	389	16	663	361
01.108.25	25	10	17	945	417	16	713	384
01.108.32	32	10	18.5	1026	455	16	774	417
01.108.40	40	10	20	1099	489	20	835	446
01.108.50	50	12	23	1175	520	20	890	479
01.108.63	63	12	26.5	1278	568	22	673	518

LEWMAR®





LEWMAR Delta® DTX stainless steel anchor

New version of the renowned Delta Inox, DTX is 100% of **316 stainless steel**. With unchanged and patented geometry, still unmatched, it ensures high holding power to grab into any seabed and quickness to re-grab the hold under all conditions. Certified as Ordinary Holding Power, 3-year warranty.

Code	kg	Recommended chain mm	Recommended for hulls up to m	A mm	B mm	C mm	D mm	E mm
01.106.10	10	8	9.5	695	310	13	526	282
01.106.16	16	8	13	812	362	13	614	328
01.106.20	20	10	15.5	877	392	16	663	357
01.106.25	25	10	17	945	415	16	713	387
01.106.32	32	10	19	1023	453.5	20	775	425

LEWMAR®

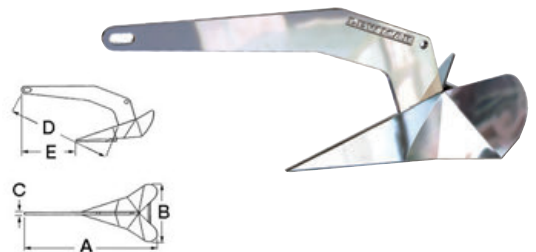

LEWMAR Delta® stainless steel anchor

HIGH HOLDING POWER

Ultra-resistant stainless steel version with the same high performance as the standard Delta. **Lifetime warranty against breaks** and Lloyd's Test Certification as **High Holding Power anchor**.

Code	kg	Recommended chain mm	Recommended for hulls up to m	A mm	B mm	C mm	D mm	E mm
01.107.10	10	8	11	695	308	12	526	283
01.107.16	16	8	13	812	360	12	614	334
01.107.20	20	10	15.5	877	389	16	663	361
01.107.25	25	10	17	945	417	16	713	384
01.107.40	40	10	20	1099	489	20	835	446
01.107.50	50	12	23	1175	520	20	890	479
01.107.63	63	12	26.5	1278	568	22	673	518

LEWMAR®

