



REMOTE CONTROLS



RRC Radiocomandi Radio Remote Controls

Trasmettitori tascabili Pocket transmitters



- Funzionamento gestito da microcontrollore.
- Possibilità di comandare più ricevitori con lo stesso trasmettitore.
- Due funzioni attivabili contemporaneamente.
- Galleggiante.
- Utilizzabile anche con batterie ricaricabili (solo Serie H).
- Retro-illuminazione a LED della tastiera (solo Serie H).
- Microcontroller-operated functions.
- Possibility to control more receivers with one transmitter.
- Two functions can be activated at the same time.
- Floating.
- Also working with rechargeable batteries (Only H series).
- LED Backlit function keys (Only H series).

Trasmettitori palmari Handheld transmitters

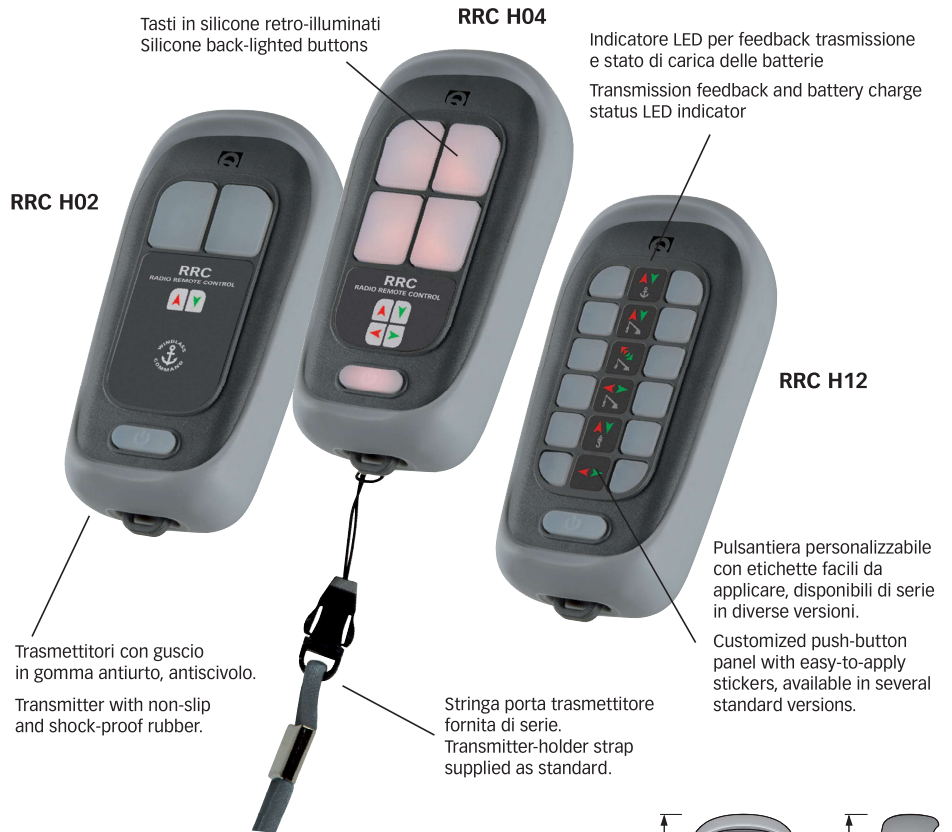

Dimensioni in mm (pollici) / Dimensions in mm (inch)

Modelli / Models	P02	P04	P902	P904	H02	H04	H12	H902	H904	H912
Direttiva di conformità Directive Compliance	2014/53/EU (RED)		FCC CFR47 - Part 15 Subpart C		2014/53/EU (RED)			FCC CFR47 - Part 15 Subpart C		
Frequenza portante / Carrier frequency	434.420 Mhz		913.7Mhz		434.420 Mhz			913.7Mhz		
Modulazione / Modulation	FSK		FSK		FSK			FSK		
Numero tasti / Number of keys	2	4	2	4	2	4	12	2	4	12
Alimentazione / Power supply	Batteria CR2450 3V litio CR2450 3V lithium battery				3 batterie AAA alcaline o ricaricabili NiMH 3 alkaline AAA batteries or rechargeable NiMH					
Temperatura operativa / Operating temperature	-15° C +70° C (+5°F ÷ +158°F)				-15° C +70° C (+5°F ÷ +158°F)					
Grado di protezione Protection rating					IP67					
Peso con batterie / Weight with battery	34 g (0,07 lb)				135 g (0,29 lb)					