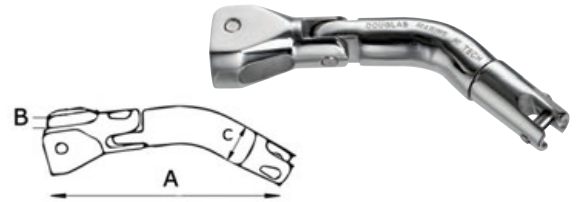


**Trimmer anchor swivelling connector****AISI 316**

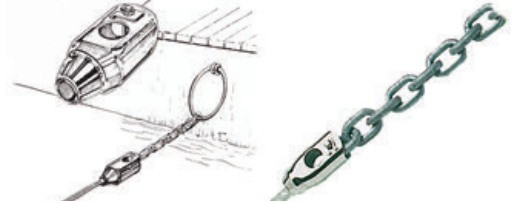
Polished AISI 316 stainless steel. Fitted with a double joint to avoid the lever boom effect with held-on anchor. Anti-oscillation connection to the anchor during lifting when approaching the roller/bow. Safety screws. Side load 3 times as powerful as traditional connectors.

| Code      | Chain Ø mm | Breaking load kg | A mm | B mm | C mm  |
|-----------|------------|------------------|------|------|-------|
| 01.739.01 | 6/8        | 3200             | 200  | 15   | 7/17  |
| 01.739.02 | 10/12      | 8500             | 230  | 22   | 20/30 |
| 01.739.03 | 12         | 12000            | 235  | 27   | 30/50 |

*Douglas Marine***Rope/chain connector****AISI 316**

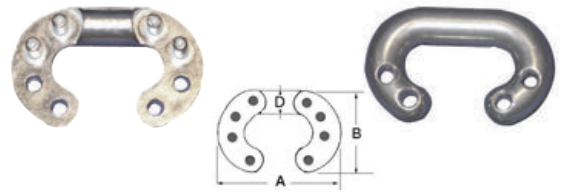
Designed to connect the anchor chain into the respective line, without knots; it is also suitable for stern mooring. Made of **mirror-polished AISI 316 stainless steel**.

| Code      | Chain Ø mm | For line Ø mm |
|-----------|------------|---------------|
| 01.230.01 | 6          | 10            |
| 01.230.02 | 8          | 12            |

**Chain link for calibrated chain****AISI 316**


In **stainless steel AISI 316**. High strength due to the structure with 8 sealing pins, calibrated for winches, thus **they run perfectly in the gypsy avoiding dangerous jamming**.

| Code      | Breaking load kg | Ø D mm | A mm | B mm |
|-----------|------------------|--------|------|------|
| 01.672.06 | 1630             | 6      | 31.5 | 20.5 |
| 01.672.08 | 3200             | 8      | 40.5 | 26.5 |
| 01.672.10 | 5000             | 10     | 50.5 | 35.5 |
| 01.672.12 | 6500             | 12     | 61   | 40.5 |

**OSCULATI****Chain link**

Made of stainless steel, for calibrated chain

| Stainless steel | Ø D Chain mm | Breaking load kg | A1 mm | A mm | L mm | L1 mm |
|-----------------|--------------|------------------|-------|------|------|-------|
| 01.671.06       | 6            | 700              | 11    | 23   | 21   | 21    |
| 01.671.08       | 8            | 1240             | 12.5  | 29   | 24   | 24    |
| 01.671.10       | 10           | 1940             | 15    | 34.5 | 29   | 29    |
| 01.671.12       | 12           | 2780             | 19    | 42   | 38   | 38    |

**Galvanized steel swivel made for anchor chains and buoys**

Double eye, ideal for mooring lines

| Code      | Breaking load kg | A mm | B mm | b1 mm | L mm | L1 mm |
|-----------|------------------|------|------|-------|------|-------|
| 01.427.10 | 5000             | 10   | 51   | 30.8  | 125  | 23.5  |
| 01.427.12 | 8000             | 13   | 63   | 36    | 165  | 33    |
| 01.427.14 | 11700            | 16   | 75.5 | 42.6  | 200  | 40.8  |
| 01.427.16 | 16300            | 19   | 88.5 | 50    | 225  | 42.8  |

**AISI316 stainless steel swivel**

Double eye, ideal for mooring lines.

| Code      | Breaking load kg | A mm | B mm | b1 mm | L mm | L1 mm |
|-----------|------------------|------|------|-------|------|-------|
| 01.018.04 | 450              | 4    | 19.5 | 11.5  | 50   | 13    |
| 01.018.05 | 650              | 5    | 23   | 13    | 60   | 13    |
| 01.018.06 | 1200             | 6    | 26   | 15    | 65   | 15    |
| 01.018.08 | 1900             | 8    | 35   | 20    | 90   | 22    |
| 01.018.10 | 3500             | 10   | 44   | 24    | 115  | 27    |
| 01.018.13 | 5000             | 13   | 59   | 33    | 148  | 33    |
| 01.018.16 | 6500             | 16   | 75   | 39    | 188  | 42    |

**Mirror-polished AISI 316 stainless steel swivel**

Very sturdy, forged steel, ideal for mooring buoys, halyards, anchor chains, etc.

| Shackle + shackle | Shackle + shackle (flush pin) | Eye + shackle | Eye + shackle (flush pin) | A mm | B mm | C mm | D mm |
|-------------------|-------------------------------|---------------|---------------------------|------|------|------|------|
| 01.428.99         | -                             | 01.427.99     | -                         | 60   | 10   | 11   | 5    |
| 01.429.00         | 01.439.00                     | 01.428.00     | 01.438.00                 | 66   | 12   | 11   | 6    |
| 01.429.01         | 01.439.01                     | 01.428.01     | 01.438.01                 | 88   | 16   | 16   | 8    |
| 01.429.02         | 01.439.02                     | 01.428.02     | 01.438.02                 | 113  | 20   | 22   | 10   |
| 01.429.03         | 01.439.03                     | 01.428.03     | -                         | 152  | 26   | 28   | 13   |
| 01.429.04         | -                             | 01.428.04     | -                         | 188  | 32   | 36   | 16   |

