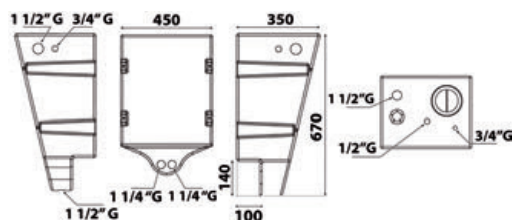


**OSCULATI****Waste water tank, for bulkhead mounting**

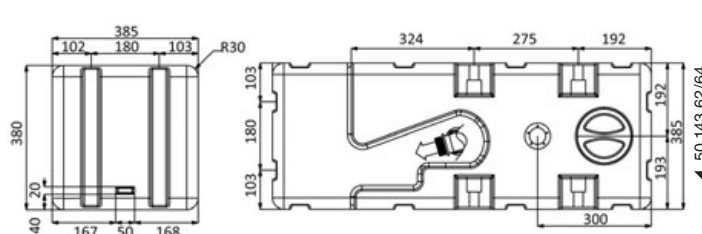
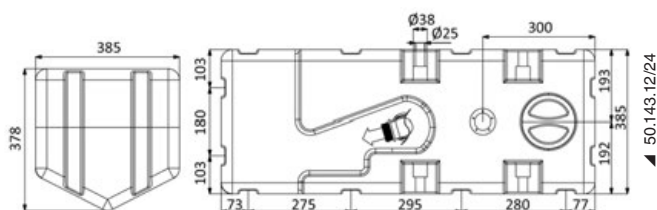
Designed with **gravity** draining system, no pump required, includes 3/4" - 1" 1/2 female threadings for load, 1" 1/4 female threadings for unload, vent and level indicator flange, made according with ISO 8099 standards.

Code	Capacity l	Max length for float cm	↔ mm
50.145.60	60	60	450 x 350 depth x 670 total height

**OSCULATI****Waste water tank with built-in WHALE macerator****WHALE®**

Pre-assembled tank with "WHALE Gulper toiler" macerator 50.113.xx. The WHALE unblockable and non-clog macerator doesn't have impellers. The tank is designed with inlets/outlets to hose connectors in order to avoid threaded connections as much as possible thus preventing bad smell. Equipped with: inspection trapdoor; 5-bore flange for level sensor (to order separately); sockets for fixing hooks 52.195.00 (flat bottom version). Made in compliance with ISO 8099 standards.

Code	Net volume l	V	Macerator included	Macerator outlet Ø mm	Max length for float cm
50.143.12	100	12	50.113.12	38	35
50.143.24	100	24	50.113.24	38	35
50.143.62	115	12	50.113.12	38	35
50.143.64	115	24	50.113.24	38	35

**OSCULATI**

50.147.12/24



50.148.12/24



50.149.12/24

**Waste water tank with in-built soaker**

Sold already mounted and ready for installation. Compatible with all manual and electric WC. EQUIPPED WITH: electric soaker; 1" 1/2 + 3/4" loading female threads; 3/4" vent female threads; 1" 1/2 manual emergency drain female threads; housing for fastening hooks 52.195.00; shut-off valve for soaker drainage in case of maintenance; 5-bore flange for level sensor (sensor to order separately); protection for sensor level. Manufactured in compliance with the ISO 8099 standard.

Code	Net volume l	V	Recess D mm	Macerator included	Macerator outlet Ø mm	Max length for float cm	↔ mm		
50.147.12	52	12	100	50.220.12	25	39	A	B	C
50.147.24	52	24	100	50.220.24	25	39	450	350	400
50.148.12	72	12	100	50.220.12	25	39	450	350	400
50.148.24	72	24	100	50.220.24	25	39	650	330	400
50.149.12	112	12	100	50.220.12	25	39	650	330	400
50.149.24	112	24	100	50.220.24	25	39	650	490	400



Recommended joint: group "52" made of nylon, group "17" made of metal



52.195.00 Stainless steel plate, tank mounting

52.195.00

