



## 4. Hatch & Portlight

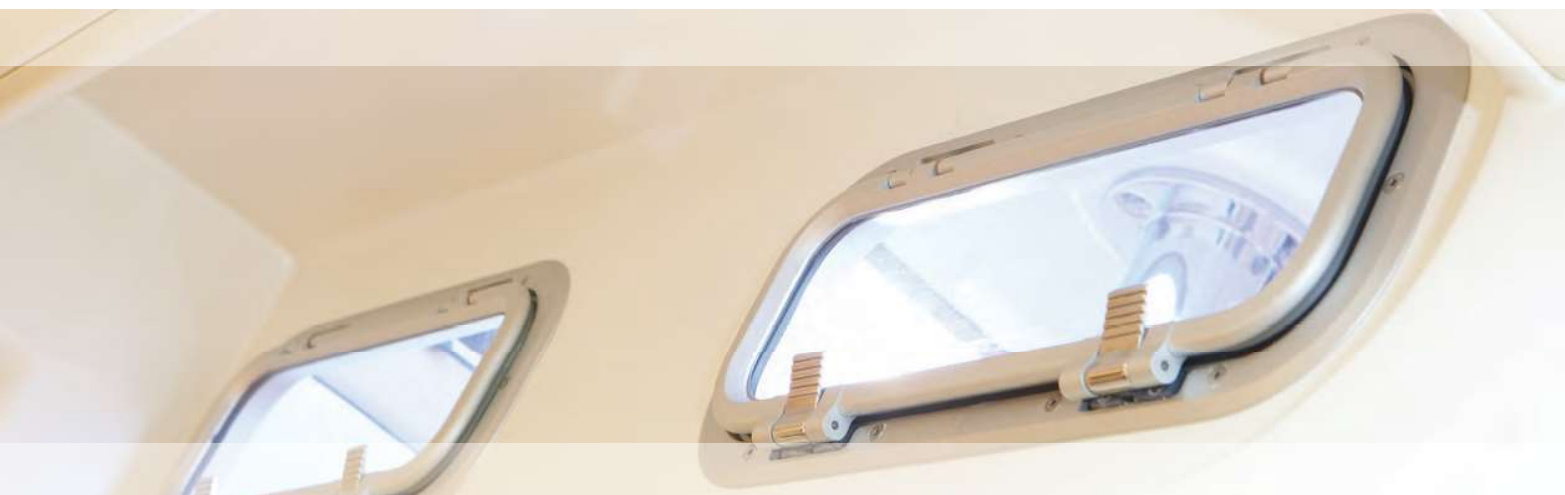

### Atlantic Portlight

The Atlantic Portlight has clean lines and proven offshore pedigree.

- Extensive range
- Flyscreens provided as standard
- Friction hinges
- Screw handles available as an option
- Full range of spare parts available on-line [www.lewmar.com](http://www.lewmar.com)

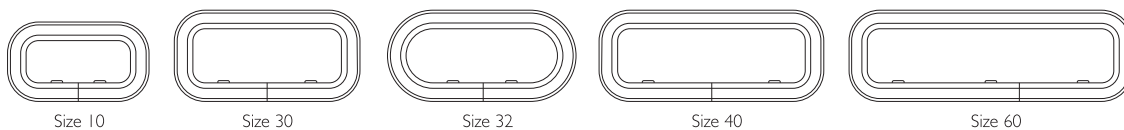

#### Specifications options:

- Clip handles standard / Screw handles optional
- Acrylic colour: Grey (standard) other colour optional
- Frame colour: Silver anodized (standard) other finish available
- Come complete with alloy valance and flyscreen
- Portlights and fixed lights come complete with fastenings as indicated in the table

#### Portlight Valance & Fastening

HULL THICKNESS MM	VALANCE TYPE	FASTENING	
8-10	THIN HULL VALANCE	360360999 <sup>1</sup>	M5 X 12MM LONG
11-15	THIN HULL VALANCE	360361999	M5 X 16MM LONG
16-19	THICK HULL VALANCE	360362999	M5 X 20MM LONG
20-24	THICK HULL VALANCE	360363999 <sup>2</sup>	M5 X 25MM LONG


<sup>1</sup> Supplied as standard with thin hull valances

<sup>2</sup> Supplied as standard with thick hull valances


Fastenings supplied in bags of 100



Atlantic Portlight Dimensions

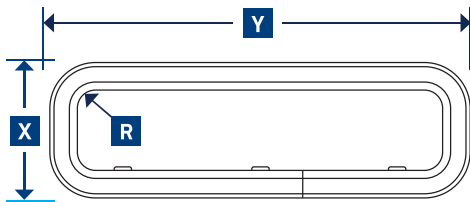

Atlantic Portlight Cut-out

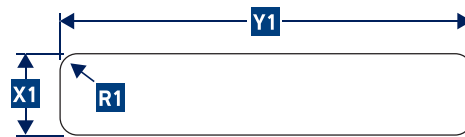

PART NUMBER		OVERALL DIMENSIONS										CUT-OUT DIMENSIONS						PORTLIGHT WEIGHT		ACRYLIC WINDOW THICKNESS	
THIN VALANCE	THICK VALANCE	X LENGTH		Y WIDTH		Z HEIGHT		R RADI		X1 LENGTH		Y1 WIDTH		R1 RADI		KG	LB	MM	IN		
SIZE	SIZE	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN	MM	IN						
39110090	39110070	10	174	6 15/16	304	12	6	1/4	71	2 13/16	154	6 1/16	284	11 3/16	61	2 3/8	1.6	3.5	8	5/16	
39130090	39130070	30	200	7 7/8	400	15 3/4	6	1/4	71	2 13/16	180	7 1/16	380	14 15/16	61	2 3/8	2.2	4.8	8	5/16	
39132090	39132070	32	198	7 13/16	401	15 13/16	6	1/4	99	3 7/8	178	7	381	15	89	3 1/2	2.1	4.6	8	5/16	
39140090	39140070	40	200	7 7/8	480	18 7/8	6	1/4	71	2 13/16	180	7 1/16	460	18 1/8	61	2 3/8	2.5	5.5	8	5/16	
39160090	39160070	60	200	7 7/8	600	23 5/8	6	1/4	71	2 13/16	180	7 1/16	580	22 13/16	61	2 3/8	3.0	6.6	8	5/16	

Specifications options:

- Smoke grey acrylic and silver anodise frames
- Should be fitted to a flat surface with a max tolerance of  $\pm 1$ mm
- Come complete with fastenings as indicated on above table
- Portlight opening is restricted on very thick hulls.
- At 24mm hull thickness opening angle is 115°

