


VA NX inflating valve

EASY MAINTENANCE

VA NX is smaller than other valves currently available on the market. Its main feature is that the valve body can be replaced without removing the external part glued to the inflatable (only the internal valve is replaced).

| Code | Colour | Fabric thickness | A mm | B mm | Bore Ø mm | Nominal flow rate L/m |
|-----------|-------------------|------------------|------|------|-----------|-----------------------|
| 66.446.35 | grey | 0.5 - 3.5 | 69 | 42 | 43 | 2000 |
| 66.446.36 | Black | 0.5 - 3.5 | 69 | 42 | 43 | 2000 |
| 66.446.37 | chromed | 0.5 - 3.5 | 69 | 42 | 43 | 2000 |
| 66.446.38 | - Valve body only | - | - | - | - | - |

66.446.46 Spanner kit including: universal spanner 66.446.45 + specific spanner for VA NX valve tightening

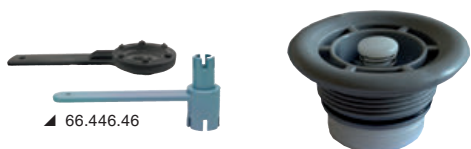


OSCULATI



Boston valve

Boston valve for low-pressure dinghies, kayaks, canopies and inflatables.

| Code | Material | Ø mm | Thread Ø | Height mm |
|-----------|----------|------|----------|-----------|
| 66.446.20 | Nylon | 44 | M24*1.5 | 19.5 |

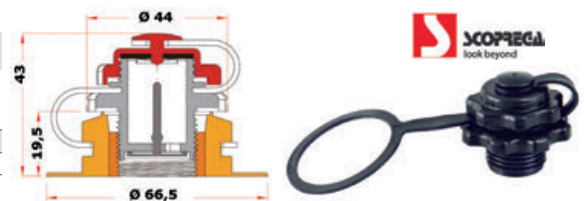

Pressure relief valve

Designed to prevent overinflating in inflatables. The valve can be left open at all times, or it can be closed and then opened for recurring checks. Hole in the fabric: 37-mm diameter.

| Code | Calibration | |
|-----------|-------------|----------|
| | Opening | Closing |
| 66.446.68 | 250 mbar | 230 mbar |
| 66.446.69 | 300 mbar | 270 mbar |
| 66.446.70 | 350 mbar | 310 mbar |



Adapter for inflators and valves

Code 66.446.54
Bayonet adapter for inflator hose (Ø 20 mm) and inflating valves item 66.446.64; 66.446.65 and equivalent (Halkey Roberts, Ceredi etc).



Manometer for inflator

It can be placed between the inflator and the valve for a progressive reading or directly in the valve for an immediate reading.

| Code | For rubber dinghies | Full scale |
|-----------|---------------------------|------------------|
| 66.446.62 | Standard | 0.5 bar (8 PSI) |
| 66.446.63 | With high-pressure bottom | 1.0 bar (15 PSI) |



Pressure Gauge for valves

It plugs directly into the inflatable valve by means of a universal adapter.

| Code | Full scale |
|-----------|------------------|
| 66.446.72 | 0.5 bar (8 PSI) |
| 66.446.73 | 1.0 bar (15 PSI) |



Digital manometer

It can be located between the inflator and the valve or directly into the valve for instant reading. IP65 watertight case. Settable in mbar, psi, kpa, bar.

| Code | Full scale | Resolution | Power supply |
|-----------|------------|------------|--------------|
| 66.446.75 | 0-999 mbar | 10 mbar | 9V battery |



Universal valve key

| Code | For valves |
|-----------|-----------------|
| 66.446.45 | 66.446.64/65/41 |

